


Notes:

1. Eccentricity should be avoided. Anchor Head 'A' Below is optimal for three strands. 'B' is unsuitable and 'C' is a satisfactory alternative.

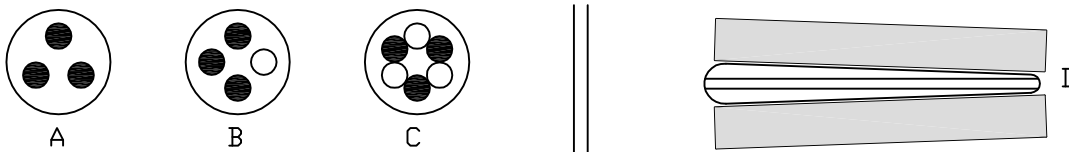

2. Wedging should be avoided. Load shedding will occur at 'D' giving false readings. The cell should be removed and reset with any eccentricity eliminated.

General Arrangement of Hydraulic Load Cell Installation
14 June 2001 S.Bailey **Not To Scale**

